

TABLE I
PARTS OF THE STANDARD



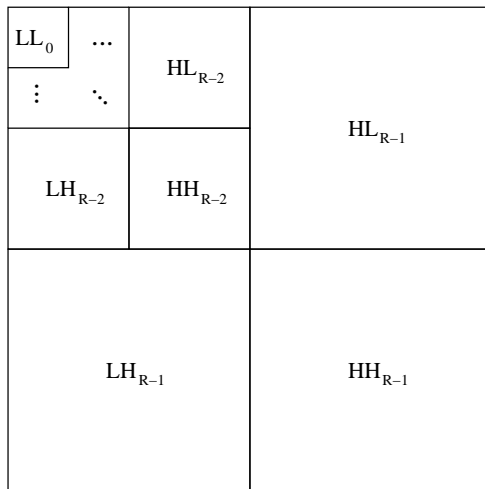


Fig. 7. Subband structure.

Suppose that a $(R - 1)$ -level wavelet transform is to be employed




Fig. 9. Templates for conte

Algorithm 3 Cleanup pass algorithm.

1: **for** each vertical scan

K.2 Packet Body Coding

The algorithm used to encode the packet body is relatively simple. The code blocks are examined in the same order as in the case of the packet header. If any new passes were specified in the corresponding packet header, the data for these coding passes are concatenated to the packet body.

Type	Length (if required)	Parameters (if required)
16 bits	16 bits	variable length

Fig. 13. Marker segment structure.


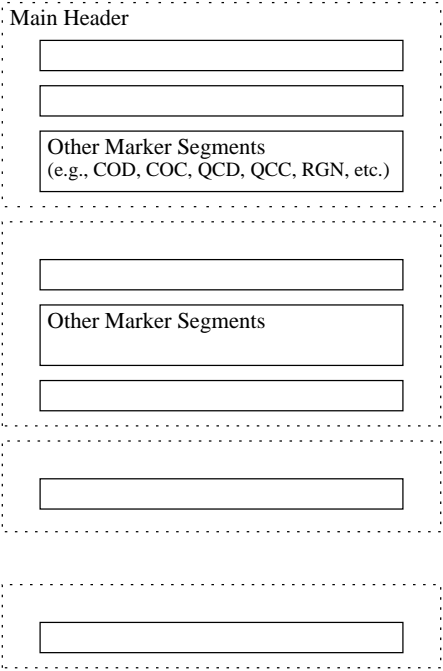


TABLE III
BOX TYPES

Type	Description
JPEG-2000 Signature	Identifies the file as being in the JP2 format. Alw

tools in JPEG 2000,” *Signal Processing: Image Communication*, vol. 17, no. 1, pp. 85–104, Jan. 2002.



Michael D. Adams was born in Kitchener, ON, Canada. He received the B.A.Sc. degree in computer engineering from the Uni